

FIBER OPTIC CABLE AERIAL SLACK STORAGE RACK




CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4601


07/01/2020

CITY ENGINEER

SHT 1 OF 3

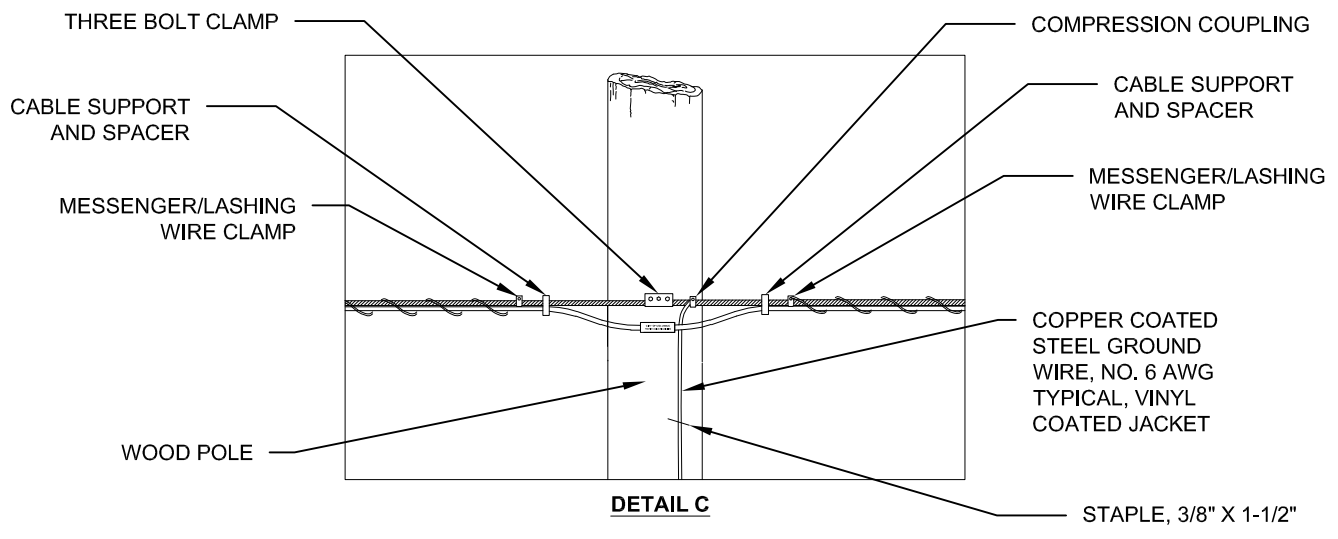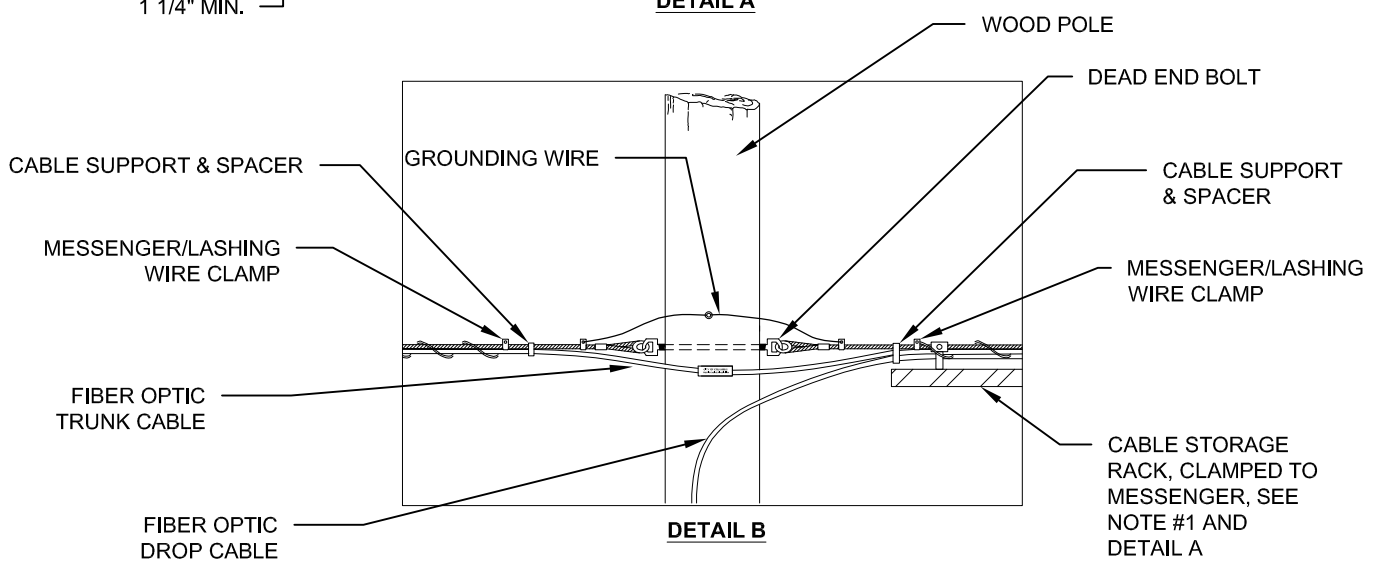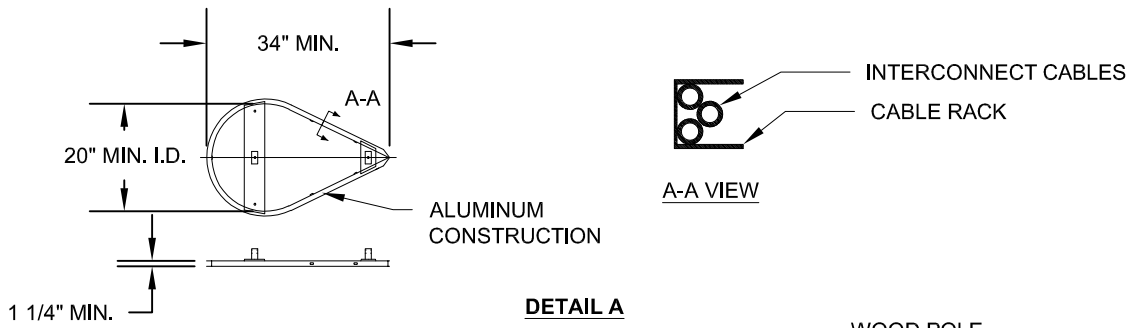


FIBER OPTIC CABLE AERIAL SLACK STORAGE RACK

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION  CITY ENGINEER	STD DWG 4601
	07/01/2020
	SHT 2 OF 3

NOTES:

1. INSTALLATION AND DIMENSIONS AS SHOWN ARE TYPICAL AND WILL VARY BETWEEN SITES. MANUAL ADJUSTMENT OF SPACING BETWEEN RACKS AND PLACEMENT OF SPLICE ENCLOSURE WILL BE REQUIRED IN FIELD TO ENSURE ALL CABLES AND HARDWARE IS SECURELY FASTENED TO AERIAL SPAN
2. SLACK CABLE SHALL NOT BE STORED OVER ROADWAYS OR DRIVEWAYS AND SHALL BE 10 FEET (MINIMUM) FROM POLES AT SIGNALIZED INTERSECTIONS.
3. FOR FIBER OPTIC CABLE, STORE A MINIMUM OF 75 FEET OF EACH CABLE ENTERING THE ADJACENT SPLICE ENCLOSURE OR AS SHOWN ON PLANS.
4. CABLE STORAGE RACKS SHALL BE USED FOR ALL AERIAL INTERCONNECT CABLE SLACK STORAGE.

FIBER OPTIC CABLE AERIAL SLACK STORAGE RACK	
CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION	STD DWG 4601
	07/01/2020
CITY ENGINEER	SHT 3 OF 3